
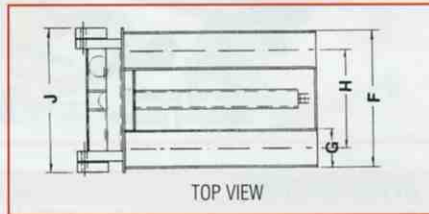
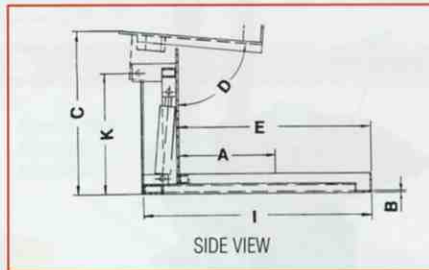


STATIONARY TILTER

2,000/4,000/6,000 LBS



TILT ANGLE

- 0-85°

SAFETY

- Velocity fuse on each cylinder to eliminate tilter from collapsing due to hose failure
- Hold down tabs (3 points)

LOWERED HEIGHT OF TILTER

- Floor level

POWER SUPPLIES

Air/Hydraulic
Foot Pedal
(80 p.s.i., 20 c.f.m. min.)
(hand held pendant optional)

A/C 115/60/1

Hand Held or Foot Control (Standard)

OPTIONS

- Tilt Angle increases or reduces

***NOTE:** Must be bolted into place before using

SPECIFICATIONS		STR 20	STR 40/STR 60
Capacity	lbs.	2,000	4,000 / 6,000
A	Load Centre	in. 20	20
B	Lowered Height	in. 5/16 c/w beveled edge	3/8" c/w beveled edge
C	Lift	in. 32	32
D	Tilt Angle	85°	85°
E	Fork Length	in. 40	40
F	Fork Width	in. 29	29
G	Fork Width	in. 8	8
H	Fork Center	in. 20 1/2	20 1/2
I	Overall Length	in. 47	47
J	Width	in. 30	30
K	Height	in. 25	25
	Weight	lbs. 450	650