

# LIGHT DUTY STATIONARY LIFTS


1,000/1,500 LBS

LIFT & TILTS



## STATIONARY FOOT PUMP - MANUALLY POWERED SCISSOR LIFTS

MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE (W X L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (IN.)	TRAVEL (IN.)	TOTAL HT (IN.)	STROKES TO MAX HT	SHIP WEIGHT (LBS)
<b>24" TRAVEL</b>								
LDF24-10	1,000	24 x 36	48 x 60	5 1/2	24	29 1/2	31	290
LDF24-15	1,500	24 x 36	48 x 60	5 1/2	24	29 1/2	49	295
<b>36" TRAVEL</b>								
LDF36-10	1,000	24 x 48	48 x 72	5 1/2	36	41 1/2	40	340
LDF36-15	1,500	24 x 48	48 x 72	5 1/2	36	41 1/2	62	345

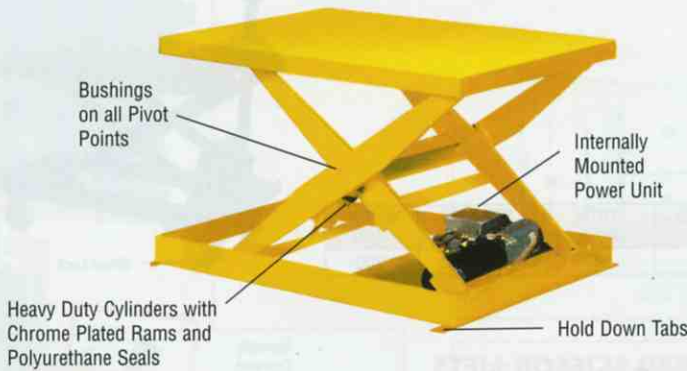

## STATIONARY A/C 110 POWER - HAND CONTROL SCISSOR LIFTS

MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE (W X L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (IN.)	TRAVEL (IN.)	TOTAL HT (IN.)	RAISING TIME	SHIP WEIGHT (LBS)
<b>24" TRAVEL</b>								
LDL24-10	1,000	24 x 36	48 x 60	5 1/2	24	29 1/2	12 sec.	290
LDL24-15	1,500	24 x 36	48 x 60	5 1/2	24	29 1/2	20 sec.	295
<b>36" TRAVEL</b>								
LDL36-10	1,000	24 x 48	48 x 72	5 1/2	36	41 1/2	20 sec.	325
LDL36-15	1,500	24 x 48	48 x 72	5 1/2	36	41 1/2	28 sec.	330

### CAPACITY

- 1,000/1,500 lbs.

### PLATFORM SIZES

- 24" wide x 36" long
- 24" wide x 48" long

### BASE SIZES

- 24" wide x 36" long
- 24" wide x 48" long

### TRAVEL

- 24" & 36"

### LOWERED HEIGHT

- 5 1/2"

### SAFETY

- Velocity fuse on all cylinders

### POWER SUPPLIES

Foot Pump - manually powers lifts, foot release for controlled lowering

#### A/C 110 volt

Hand Control (standard)

Foot Control (optional)

Internally Mounted

#### A/C 460/575/3/60 volt (opt.)

Externally Mounted

#### Air/Hydraulic

Foot operated (standard)

Hand operated (optional)

### MAINTENANCE

- Hinged top for easy access to power unit and cylinders
- Self lubricated bushings on all pivot points

### OPTIONS

- Oversized platforms
- Rotating tops
  - spring detents
- Bellow safety skirting
- Semi-portable
- Portable (see reverse)